



Couplings & Accessories™

Kuri-Clamp™ Worm Gear Clamps



**Constant
Tension**

Mini

**Standard
Duty**

**Heavy
Duty**



Kuriyama of America, Inc.



ISO 9001:2008
QUALITY M.S.

EDITION 1018

Kuri-Clamp™ Standard Duty Worm Gear Clamp



WGC-CS Series WGC-SS Series

General Applications:

- Automotive
- Industrial
- General purpose

Construction (WGC-CS): Four-piece construction consisting of a 1/2" wide, 300 series stainless steel band; plated carbon steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

Construction (WGC-SS): Four-piece construction consisting of a 1/2" wide, 300 series stainless steel band; stainless steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

Features and Advantages:

- **Quadra-Lock Housing** – Four-piece, quadra-lock housing design: added saddle eliminates risk of seam separation, virtually eliminating housing "lift and twist".
- **Evenly Distributed Radial Pressure** – Quality controlled to military standard specifications for even distribution of sealing pressure. Eliminates leakage caused by uneven housings and provides higher sealing pressure with lower applied torque.
- **Arched, Perforated Slots** – Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- **Stainless Steel Band** – 300 series stainless steel band provides durability and superior corrosion resistance.
- **Hex Screw** - Sharply defined hex angles for better gripping power. More threads per screw results in increased torque strength.
- **Meets Industry Standards** – Clamps are SAE J1508 Type F and RoHS compliant.
- **Torque Rating** – Suggested installation torque of 25-37 inch pounds (WGC-CS), and 30-45 inch pounds (WGC-SS).

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Kuri-Clamp™ Standard Duty Worm Gear Clamp

Kuri-Clamp™ Standard Duty Worm Gear Clamp

Stainless Steel Band & Housing with Carbon Steel Screw

Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-CS06	7/16 - 25/32	10	1/2	25-37	0.60
WGC-CS08	1/2 - 29/32	10	1/2	25-37	0.60
WGC-CS10	9/16 - 1 1/16	10	1/2	25-37	0.60
WGC-CS12	11/16 - 1 1/4	10	1/2	25-37	0.60
WGC-CS16	13/16 - 1 1/2	10	1/2	25-37	0.70
WGC-CS20	13/16 - 1 3/4	10	1/2	25-37	0.70
WGC-CS24	1 1/16 - 2	10	1/2	25-37	0.80
WGC-CS28	1 5/16 - 2 1/4	10	1/2	25-37	0.80
WGC-CS32	1 9/16 - 2 1/2	10	1/2	25-37	0.80
WGC-CS36	1 13/16 - 2 3/4	10	1/2	25-37	0.90
WGC-CS40	2 1/16 - 3	10	1/2	25-37	0.90
WGC-CS44	2 5/16 - 3 1/4	10	1/2	25-37	0.90
WGC-CS48	2 9/16 - 3 1/2	10	1/2	25-37	1.00
WGC-CS52	2 13/16 - 3 3/4	10	1/2	25-37	1.10
WGC-CS56	3 1/16 - 4	10	1/2	25-37	1.10
WGC-CS60	3 5/16 - 4 1/4	10	1/2	25-37	1.20
WGC-CS64	3 9/16 - 4 1/2	10	1/2	25-37	1.20
WGC-CS72	1 7/8 - 5	10	1/2	25-37	1.30
WGC-CS80	2 1/2 - 5 1/2	10	1/2	25-37	1.40
WGC-CS88	3 1/8 - 6	10	1/2	25-37	1.40
WGC-CS96	3 5/8 - 6 1/2	10	1/2	25-37	1.50
WGC-CS104	4 1/8 - 7	10	1/2	25-37	1.50

* CLAMPS ONLY SOLD IN BOX QUANTITIES


Kuri-Clamp™ Standard Duty Worm Gear Clamp

Stainless Steel Band, Housing, & Screw

Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-SS06	7/16 - 25/32	10	1/2	30-45	0.60
WGC-SS08	1/2 - 29/32	10	1/2	30-45	0.60
WGC-SS10	9/16 - 1 1/16	10	1/2	30-45	0.60
WGC-SS12	11/16 - 1 1/4	10	1/2	30-45	0.60
WGC-SS16	13/16 - 1 1/2	10	1/2	30-45	0.70
WGC-SS20	13/16 - 1 3/4	10	1/2	30-45	0.70
WGC-SS24	1 1/16 - 2	10	1/2	30-45	0.80
WGC-SS28	1 5/16 - 2 1/4	10	1/2	30-45	0.80
WGC-SS32	1 9/16 - 2 1/2	10	1/2	30-45	0.80
WGC-SS36	1 13/16 - 2 3/4	10	1/2	30-45	0.90
WGC-SS40	2 1/16 - 3	10	1/2	30-45	0.90
WGC-SS44	2 5/16 - 3 1/4	10	1/2	30-45	0.90
WGC-SS48	2 9/16 - 3 1/2	10	1/2	30-45	1.00
WGC-SS52	2 13/16 - 3 3/4	10	1/2	30-45	1.10
WGC-SS56	3 1/16 - 4	10	1/2	30-45	1.10
WGC-SS60	3 5/16 - 4 1/4	10	1/2	30-45	1.20
WGC-SS64	3 9/16 - 4 1/2	10	1/2	30-45	1.20
WGC-SS72	1 7/8 - 5	10	1/2	30-45	1.30
WGC-SS80	2 1/2 - 5 1/2	10	1/2	30-45	1.40
WGC-SS88	3 1/8 - 6	10	1/2	30-45	1.40
WGC-SS96	3 5/8 - 6 1/2	10	1/2	30-45	1.50
WGC-SS104	4 1/8 - 7	10	1/2	30-45	1.50

* CLAMPS ONLY SOLD IN BOX QUANTITIES

Kuri-Clamp™ Heavy Duty Worm Gear Clamp

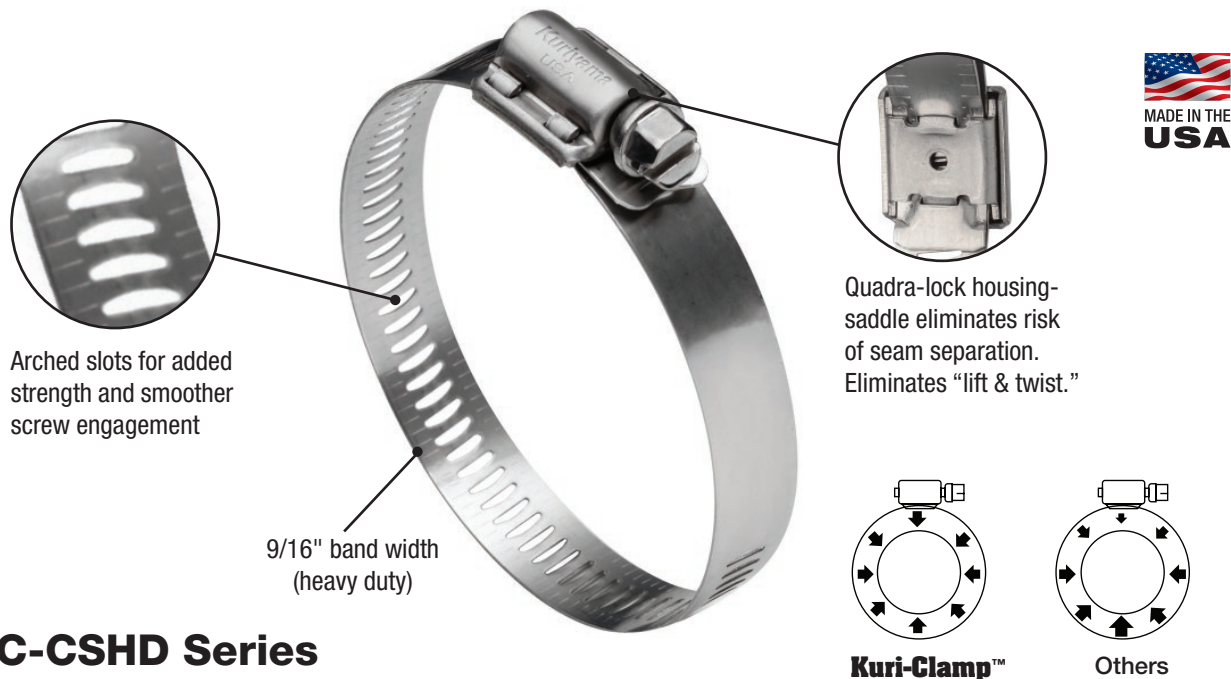

WGC-CSHD Series WGC-SSHD Series

General Applications:

- Aircraft
- Industrial

Construction (WGC-CSHD): Four-piece construction consisting of a 9/16" wide, 300 series stainless steel band; plated carbon steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

Construction (WGC-SSHD): Four-piece construction consisting of a 9/16" wide, 300 series stainless steel band; stainless steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

Features and Advantages:

- **Quadra-Lock Housing** – Four-piece, quadra-lock housing design: added saddle eliminates risk of seam separation, virtually eliminating housing "lift and twist".
- **Evenly Distributed Radial Pressure** – Quality controlled to military standard specifications for even distribution of sealing pressure. Eliminates leakage caused by uneven housings and provides higher sealing pressure with lower applied torque.
- **Arched, Perforated Slots** – Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- **Heavy Duty Stainless Steel Band** – 300 Series stainless steel band provides durability and superior corrosion resistance. Wider than standard clamps for greater strength.
- **Hex Screw** – Sharply defined hex angles for better gripping power. More threads per screw results in increased torque strength.
- **Meets Industry Standards** – Clamps are SAE J1508 Type F and RoHS compliant.
- **Torque Rating** – Suggested installation torque of 25-37 inch pounds (WGC-CSHD), and 30-45 inch pounds (WGC-SSHD).

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Kuri-Clamp™ Heavy Duty Worm Gear Clamp

**Kuri-Clamp™ Heavy Duty
Worm Gear Clamp**
Stainless Steel Band & Housing with
Carbon Steel Screw

**Kuri-Clamp™ Heavy Duty
Worm Gear Clamp**
Stainless Steel Band, Housing, & Screw


Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-CSHD06	7/16 - 25/32	10	9/16	25-37	0.60
WGC-CSHD08	1/2 - 29/32	10	9/16	25-37	0.60
WGC-CSHD10	9/16 - 1 1/16	10	9/16	25-37	0.60
WGC-CSHD12	11/16 - 1 1/4	10	9/16	25-37	0.60
WGC-CSHD16	13/16 - 1 1/2	10	9/16	25-37	0.70
WGC-CSHD20	13/16 - 1 3/4	10	9/16	25-37	0.70
WGC-CSHD24	1 1/16 - 2	10	9/16	25-37	0.80
WGC-CSHD28	1 5/16 - 2 1/4	10	9/16	25-37	0.80
WGC-CSHD32	1 9/16 - 2 1/2	10	9/16	25-37	0.80
WGC-CSHD36	1 13/16 - 2 3/4	10	9/16	25-37	0.90
WGC-CSHD40	2 1/16 - 3	10	9/16	25-37	0.90
WGC-CSHD44	2 5/16 - 3 1/4	10	9/16	25-37	0.90
WGC-CSHD48	2 9/16 - 3 1/2	10	9/16	25-37	1.00
WGC-CSHD52	2 13/16 - 3 3/4	10	9/16	25-37	1.10
WGC-CSHD56	3 1/16 - 4	10	9/16	25-37	1.10
WGC-CSHD60	3 5/16 - 4 1/4	10	9/16	25-37	1.20
WGC-CSHD64	3 9/16 - 4 1/2	10	9/16	25-37	1.20
WGC-CSHD72	1 7/8 - 5	10	9/16	25-37	1.30
WGC-CSHD80	2 1/2 - 5 1/2	10	9/16	25-37	1.40
WGC-CSHD88	3 1/8 - 6	10	9/16	25-37	1.40
WGC-CSHD96	3 5/8 - 6 1/2	10	9/16	25-37	1.50
WGC-CSHD104	4 1/8 - 7	10	9/16	25-37	1.50
WGC-CSHD128	5 5/8 - 8 1/2	10	9/16	25-37	1.60
WGC-CSHD152	7 1/8 - 10	10	9/16	25-37	1.70
WGC-CSHD188	9 3/8 - 12 1/4	10	9/16	25-37	1.90

* CLAMPS ONLY SOLD IN BOX QUANTITIES

Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-SSHD06	7/16 - 25/32	10	9/16	30-45	0.60
WGC-SSHD08	1/2 - 29/32	10	9/16	30-45	0.60
WGC-SSHD10	9/16 - 1 1/16	10	9/16	30-45	0.60
WGC-SSHD12	11/16 - 1 1/4	10	9/16	30-45	0.60
WGC-SSHD16	13/16 - 1 1/2	10	9/16	30-45	0.70
WGC-SSHD20	13/16 - 1 3/4	10	9/16	30-45	0.70
WGC-SSHD24	1 1/16 - 2	10	9/16	30-45	0.80
WGC-SSHD28	1 5/16 - 2 1/4	10	9/16	30-45	0.80
WGC-SSHD32	1 9/16 - 2 1/2	10	9/16	30-45	0.80
WGC-SSHD36	1 13/16 - 2 3/4	10	9/16	30-45	0.90
WGC-SSHD40	2 1/16 - 3	10	9/16	30-45	0.90
WGC-SSHD44	2 5/16 - 3 1/4	10	9/16	30-45	0.90
WGC-SSHD48	2 9/16 - 3 1/2	10	9/16	30-45	1.00
WGC-SSHD52	2 13/16 - 3 3/4	10	9/16	30-45	1.10
WGC-SSHD56	3 1/16 - 4	10	9/16	30-45	1.10
WGC-SSHD60	3 5/16 - 4 1/4	10	9/16	30-45	1.20
WGC-SSHD64	3 9/16 - 4 1/2	10	9/16	30-45	1.20
WGC-SSHD72	1 7/8 - 5	10	9/16	30-45	1.30
WGC-SSHD80	2 1/2 - 5 1/2	10	9/16	30-45	1.40
WGC-SSHD88	3 1/8 - 6	10	9/16	30-45	1.40
WGC-SSHD96	3 5/8 - 6 1/2	10	9/16	30-45	1.50
WGC-SSHD104	4 1/8 - 7	10	9/16	30-45	1.50
WGC-SSHD128	5 5/8 - 8 1/2	10	9/16	30-45	1.60
WGC-SSHD152	7 1/8 - 10	10	9/16	30-45	1.70
WGC-SSHD188	9 3/8 - 12 1/4	10	9/16	30-45	1.90

* CLAMPS ONLY SOLD IN BOX QUANTITIES

Kuri-Clamp™ Mini Worm Gear Clamp

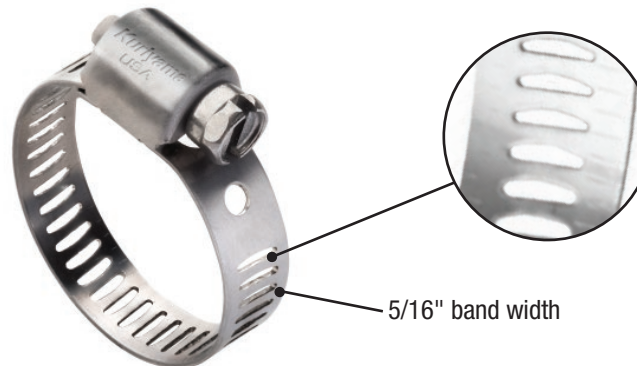

Arched slots for added strength and smoother screw engagement

WGC-MCS Series WGC-MSS Series

General Applications:

- Small diameter applications
- Air & fuel lines

Construction (WGC-MCS): Three-piece construction consisting of a 5/16" wide, 300 series stainless steel band; plated carbon steel hex screw with 1/4" head and one-piece, 300 series stainless steel housing.

Construction (WGC-MSS): Three-piece construction consisting of a 5/16" wide, 300 series stainless steel band; 300 series stainless steel hex screw with 1/4" head and one-piece, 300 series stainless steel housing.

Features and Advantages:

- **Three-piece Design** – Streamlined, lightweight, three-piece design perfect for tight installations.
- **Arched, Perforated Slots** – Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- **Stainless Steel Band** – 300 series stainless steel band provides durability and superior corrosion resistance.
- **Hex Screw** - Sharply defined hex angles for better gripping power. More threads per screw results in increased torque strength.
- **Meets Industry Standards** – Clamps are SAE J1508 Type M and RoHS compliant.
- **Torque Rating** – Suggested installation torque of 10-15 inch pounds.

Kuri-Clamp™ Mini Worm Gear Clamp Stainless Steel Band & Housing with Carbon Steel Screw

Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-MCS04	7/32 - 5/8	10	5/16	10-15	0.20
WGC-MCS06	7/16 - 25/32	10	5/16	10-15	0.20
WGC-MCS08	1/2 - 29/32	10	5/16	10-15	0.20
WGC-MCS10	9/16 - 1 1/16	10	5/16	10-15	0.20
WGC-MCS12	11/16 - 1 1/4	10	5/16	10-15	0.30

* CLAMPS ONLY SOLD IN BOX QUANTITIES

Kuri-Clamp™ Mini Worm Gear Clamp Stainless Steel Band, Housing, & Screw



Nominal Specifications					
Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-MSS04	7/32 - 5/8	10	5/16	10-15	0.20
WGC-MSS06	7/16 - 25/32	10	5/16	10-15	0.20
WGC-MSS08	1/2 - 29/32	10	5/16	10-15	0.20
WGC-MSS10	9/16 - 1 1/16	10	5/16	10-15	0.20
WGC-MSS12	11/16 - 1 1/4	10	5/16	10-15	0.30

* CLAMPS ONLY SOLD IN BOX QUANTITIES


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Kuri-Clamp™ “Constant Tension” Worm Gear Clamp

Quadra-lock housing-saddle eliminates risk of seam separation. Eliminates “lift & twist.”



Kuri-Clamp™




Others

Even Sealing Pressure – Quality controlled to comply with military standards.



Constant-tension, heavy duty spring construction controls automatic clamp adjustment.

5/8" band width (heavy duty)



“Torque check” - clamp installed correctly when screw tip “A” extends beyond the housing and washers are flat. Use of torque wrench recommended.



WGC-CT Series

General Applications:

- Air intake and coolant connections
- Systems where clamps cannot be retightened
- Systems with expansion or contraction

Features and Advantages:

- **“Constant Tension” Performance** – Belleville spring mechanism permits the clamps to automatically increase or decrease diameter due to operational or environmental temperature changes.
- **Extended Inner Liner** – Protects silicone and other soft hoses from damage, extrusion or shear.
- **Quadra-Lock Housing** – Four-piece, quadra-lock housing design: added saddle eliminates risk of seam separation, virtually eliminating housing “lift and twist”.
- **Evenly Distributed Radial Pressure** – Quality controlled to military standard specifications for even distribution of sealing pressure. Eliminates leakage caused by uneven housings and provides higher sealing pressure with lower applied torque.

Construction: 5/8" wide, 300 series stainless steel band; plated carbon steel hex screw with 3/8" head; two-piece, 300 series stainless steel housing and ten Bellville spring washers.

- **Heavy Duty Stainless Steel Band** – 300 Series stainless steel band provides durability and superior corrosion resistance. Wider than standard clamps for greater strength.
- **Arched, Perforated Slots** – Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- **Hex Screw** - Sharply defined hex angles for better gripping power. More threads per screw for increased torque strength.
- **Meets Industry Standards** – Clamps are SAE J1508 Type SLDH and RoHS compliant.
- **Torque Rating** – Suggested installation torque of 90 inch pounds.

Nominal Specifications

Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-CT175	1 - 1 3/4	10	5/8	90	1.90
WGC-CT200	1 1/4 - 2 1/8	10	5/8	90	2.00
WGC-CT250	1 3/4 - 2 5/8	10	5/8	90	2.10
WGC-CT300	2 - 3 1/8	10	5/8	90	2.30
WGC-CT350	2 3/4 - 3 5/8	10	5/8	90	2.40
WGC-CT400	3 1/4 - 4 1/8	10	5/8	90	2.40
WGC-CT450	3 3/4 - 4 5/8	10	5/8	90	2.70
WGC-CT500	4 1/4 - 5 1/8	10	5/8	90	2.80

Nominal Specifications (continued)

Part Number	Size Range (in)	Pieces Per Box	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)
WGC-CT550	4 3/4 - 5 5/8	10	5/8	90	2.80
WGC-CT600	5 1/4 - 6 1/8	10	5/8	90	2.80
WGC-CT650	5 3/4 - 6 5/8	10	5/8	90	2.80
WGC-CT700	6 1/4 - 7 1/8	10	5/8	90	3.00
WGC-CT750	6 3/4 - 7 5/8	10	5/8	90	3.00
WGC-CT800	7 1/4 - 8 1/8	10	5/8	90	3.00
WGC-CT850	7 3/4 - 8 5/8	10	5/8	90	3.00
WGC-CT900	8 1/4 - 9 1/8	10	5/8	90	3.00

*** CLAMPS ONLY SOLD IN BOX QUANTITIES**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



Cautionary Statement

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

Limited Warranty

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECTED TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT.

05/03/21 REV

Distributed by:



Kuriyama of America, Inc.

Headquarters, Sales Office and Warehouse Location

360 E. State Parkway, Schaumburg, IL 60173-5335

Phone: (847) 755-0360 • Toll-free FAX: (800) 800-0320

International FAX: (847) 885-0996

Website: www.kuriyama.com • Email: sales@kuriyama.com



CONTACT OUR SALES/WAREHOUSE LOCATIONS BELOW WHICH SERVE YOUR AREA

SOUTHWEST WAREHOUSE

KURIYAMA OF AMERICA, INC.

– HOUSTON

200 Portwall Street, Suite 100

HOUSTON, TX 77029

Phone: (713) 674-8212 • (800) 501-6808

FAX: (713) 674-5214 • (800) 800-5214

E-Mail: sales@kuriyama.com

WESTERN WAREHOUSE

KURIYAMA OF AMERICA, INC.

– SANTA FE SPRINGS

10749 SHOEMAKER AVENUE

SANTA FE SPRINGS, CA 90670-4039

Phone: (562) 941-4507

FAX: (562) 941-8940 • (800) 326-8940

E-Mail: sales@kuriyama.com

SOUTHEAST WAREHOUSE

FORTNEY SALES CO., INC.

4221 Cantrell Road NW

Acworth, GA 30101

Phone: (770) 427-6528

FAX: (770) 423-9249 • (800) 423-9249

Web Site: www.fortneysales.com

E-Mail: sales@fortneysales.com

EASTERN WAREHOUSE

EASTERN RUBBER & PLASTICS CO., INC.

100 GOLDMAN DR.

PLUMSTED INDUSTRIAL PARK

CREAM RIDGE, NJ 08514

Phone: (609) 758-0100

FAX: (609) 758-0102 • (800) 445-7138

Web Site: www.easternrubber.com

E-Mail: sales@easternrubber.com

IN CANADA:

KURI TEC CORPORATION

140 Roy Boulevard

Brantford, ON, Canada N3R 7K2

Phone: (519) 753-6717

FAX: (519) 753-7737

Web Site: www.kuritec.com

E-Mail: sales@kuritec.com

IN MEXICO:

KURIYAMA DE MÉXICO S DE RL DE CV

AV JOSE PALOMO MARTINEZ NO 520-20 BODEGA 5

PARQUE INDUSTRIAL OMOLAP

APODACA, N.L. CP:66633, MÉXICO

Telefonos: (81) 1086-1870 0 71 • 01 800 822 52 00

FAX: (81) 1086-1869

Internet: www.kuriyama.com.mx

Correo Electronico: ventas@kuriyama.com