



EDITION 0818

New Tubing Products

By Kuriyama



K05BK Series

UV Resistant Black PVC Tubing

General Applications:

- Drainage lines
- Outdoor applications
- Printing press equipment
- Transfer of weak chemicals and acids

Construction: Black phthalate free PVC compound formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ and RoHS ⁽¹⁶⁾ requirements.

Service Temperature Range:

+25°F (-4°C) to +150°F (+65°C)[†]

Features and Advantages:

- **Advanced UV Protection!** – Tubing material is specially formulated to resist the cracking that can result from exposure to damaging UV light. Great for outdoor applications.
- **Food Grade Materials** – Tubing complies with applicable FDA requirements.
- **Glass-smooth Interior** – Reduces possibility of material buildup and ensures smooth material flow.
- **Self-Extinguishing** – Tubing will not continue to burn after separation from flame source.



Nominal Specifications

Series	Size Code	Nominal ID		Nominal OD		Nominal Wall		Working Pressure (PSI) at 70°F (20°C)	Standard Lengths Coils (ft.)	Approx. Wt. per Pkg. (lbs.)
		(in)	(mm)	(in)	(mm)	(in)	(mm)			
K05BK	0406	1/4	6.4	3/8	9.5	1/16	1.6	55	100	3.4
K05BK	0608	3/8	9.5	1/2	12.7	1/16	1.6	45	100	4.7
K05BK	0810	1/2	12.7	5/8	15.9	1/16	1.6	30	100	6.0
K05BK	1216	3/4	19.1	1	25.4	1/8	3.2	35	100	18.8
K05BK	1620	1	25.4	1-1/4	31.8	1/8	3.2	25	100	24.1
K05BK	2024	1-1/4	31.8	1-1/2	38.1	1/8	3.2	20	50	14.8
K05BK	2432	1-1/2	38.1	2	50.8	1/8	3.2	35	50	37.5

† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

Note: For details of the following compliances, refer to page 63 of the Kuri Tec catalog.

FDA⁽⁰³⁾, PHthalate FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

2840 Series

98 Shore “A” Ether-Based Heavy Duty Polyurethane Tubing

General Applications:

- Abrasive slurry transfer
- Feed and return lines
- Granular transfer lines
- Lubrication lines
- Metering pumps
- Robotics control lines
- Transfer of air and fluids under severe conditions

Construction: Clear 98 Shore “A” Durometer ether based polyurethane tubing formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ requirements. Meets NSF⁽⁰⁹⁾ and RoHS⁽¹⁶⁾ criteria.

Service Temperature Range:

-40°F (-40°C) to +175°F (+80°C)[†]

Features and Advantages:

- **Abrasion Resistant Polyurethane** – Resistant to cuts and damage from abrasion such as dragging or rubbing against rough objects. Tubing is up to three times more wear resistant than similar PVC tubing!
- **Food Grade Materials** – Tubing complies with applicable FDA, NSF 51 and NSF 61 requirements.
- **Oil Resistant** – Remains flexible when exposed to most fuels and oils. Meets ARPM Class A rating (high oil resistance).
- **Hydrolysis Resistant** – Ether based material good for water applications.
- **Low Moisture Absorption Rate** – Helps eliminate cross contamination of the transferred materials and instances of swelling which can shorten tubing life.
- **High Cycle Strength** – Designed to resist damage resulting from constant flex applications.



Nominal Specifications

Series	Size Code	Nominal OD		Nominal ID		Nominal Wall		Working Pressure (PSI) at 70°F (20°C)	Standard Lengths (ft.)		Approx. Wt. per Pkg. (lbs.)	
		(mm)	(in)	(mm)	(in)	(mm)	(in)		Spool/box	Coils/box	500 ft.	100 ft.
2840	MM04	4.0	.157	2.4	.094	0.8	.031	200	500	100	3.5	0.7
2840	MM06	6.0	.236	4.0	.157	1.0	.039	180	500	100	6.5	1.3
2840	MM08	8.0	.315	5.0	.197	1.5	.059	175	500	100	13.0	2.6
2840	MM10	10.0	.394	6.5	.256	1.75	.069	150	500	100	19.5	3.9
2840	MM12	12.0	.472	8.0	.315	2.0	.079	150	500	100	26.5	5.3

[†] **Note:** Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

Note: When exceptional oil and fuel resistance is needed, we suggest use of Series 2810 ester-based tubing which is RoHS⁽¹⁵⁾ compliant — call for details.

Note: For details of the following compliances, refer to page 63 of the Kuri Tec catalog.

FDA⁽⁰³⁾, NSF⁽⁰⁹⁾, PHTHALATE FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

420N Series

Nylon 12 Tubing

General Applications:

- Chemical transfer
- Lubrication and coolant transfer
- Paint supply lines
- Pneumatic and instrumentation lines
- Pneumatic tools


Construction: Nylon 12 – natural color. In compliance with RoHS⁽¹⁶⁾ criteria.

Service Temperature Range:

-60°F (-51°C) to +200°F (+93°C)[†]

Features and Advantages:

- **Strong and Lightweight** – Nylon construction provides high strength in a lightweight product.
- **Excellent Chemical Resistance** – Compatible with many industrial chemicals and solvents.
- **High Heat Resistance** – Heat resistant up to +200°F.
- **Low Moisture Absorption Rate** – Helps eliminate cross contamination of the transferred materials and instances of swelling which can shorten tubing life.
- **Resistant to Environmental Stress Cracking (ESC)** – Highly resistant to the surface cracking caused by simultaneous exposure to stress and liquids.

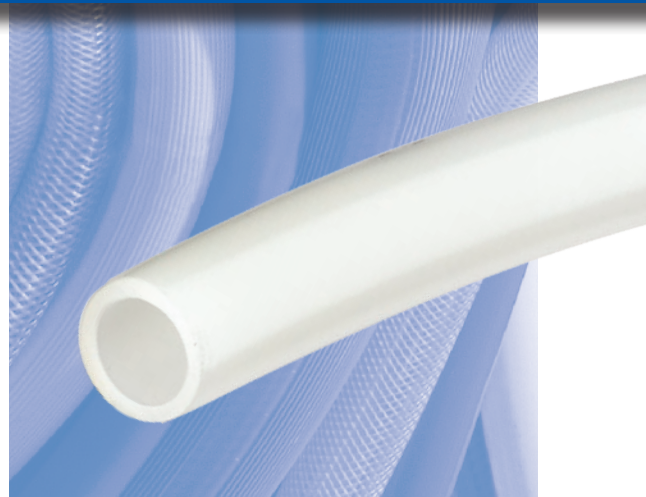

Nominal Specifications

Series	Size Code	Nominal OD		Nominal ID		Nominal Wall		Working Pressure (PSI) at 70°F (20°C)	Standard Lengths (ft.)		Approx. Wt. per Pkg. (lbs.)	
		(in)	(mm)	(in)	(mm)	(in)	(mm)		Spool/Box	Coil/Box	500 ft.	100 ft.
420N	0435	1/4	6.4	.180	4.6	.035	0.9	290	500	100	5.5	1.1
420N	0650	3/8	9.5	.275	7.0	.050	1.3	250	500	100	11.5	2.3
420N	0862	1/2	12.7	.375	9.5	.062	1.6	240	500	100	19.0	3.8

Nominal Specifications

Series	Size Code	Nominal OD		Nominal ID		Nominal Wall		Working Pressure (PSI) at 70°F (20°C)	Standard Lengths (ft.)		Approx. Wt. per Pkg. (lbs.)	
		(mm)	(in)	(mm)	(in)	(mm)	(in)		Spool/Box	Coil/Box	500 ft.	100 ft.
420N	MM04	4.0	.157	2.7	.106	0.65	.026	350	500	100	2.5	0.5
420N	MM06	6.0	.236	4.0	.157	1.0	.039	340	500	100	5.5	1.1
420N	MM08	8.0	.315	6.0	.236	1.0	.039	250	500	100	7.5	1.5
420N	MM10	10.0	.394	8.0	.315	1.0	.039	225	500	100	9.5	1.9
420N	MM12	12.0	.472	10.0	.394	1.0	.039	200	500	100	11.5	2.3

[†] **Note:** Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

Note: For details of the following compliances, refer to page 63 of the Kuri Tec catalog.

PHthalate FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

620P Series

Polytetrafluorethylene (PTFE) Tubing

General Applications:

- Aerospace and aviation applications
- Chemical transfer
- Industrial and mechanical applications
- Medical applications

Construction: PTFE – natural color. Formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ requirements. Meets USP Class VI⁽¹⁹⁾ and RoHS⁽¹⁶⁾ criteria.

Service Temperature Range:

-454°F (-270°C) to +500°F (+260°C)[†]



Features and Advantages:

- **Superior Chemical Resistance** – Chemical resistant PTFE compatible with an extremely wide range of industrial chemicals and solvents.
- **Handles Extreme Temperatures** – Service temperature range from -454°F to +500°F. Widest temperature range of any Kuri Tec product!
- **Food Grade Materials** – Tubing complies with applicable FDA and USP Class VI requirements.
- **Chemically Inert** – Will not react with most substances.
- **Flame Retardant** – Manufactured to meet UL94-V-O rating of the Standard for Safety of Flammability of Plastic Material in Devices and Appliance Testing.
- **Meets ASTM-D3295** – Physical properties compliant with ASTM requirements for PTFE tubing.

Nominal Specifications

Series	Size Code	Nominal OD		Nominal ID		Nominal Wall		Working Pressure (PSI) at 70°F (20°C)	Standard Lengths Coils (ft.)	Approx. Wt. per Pkg. (lbs.)
		(in)	(mm)	(in)	(mm)	(in)	(mm)			
620P	0463	1/4	6.4	.125	3.2	.063	1.6	372	100	2.3
620P	0431	1/4	6.4	.188	4.8	.031	0.8	174	100	1.8
620P	0663	3/8	9.5	.250	6.4	.063	1.6	240	100	5.8
620P	0863	1/2	12.7	.375	9.5	.063	1.6	150	100	6.5

[†]**Note:** Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

Note: For details of the following compliances, refer to page 63 of the Kuri Tec catalog.

FDA⁽⁰³⁾, UL⁽¹⁷⁾, USP⁽¹⁹⁾, PHTHALATE FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Cautionary Statement

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

Limited Warranty

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECTED TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT.

05/03/21 REV

Distributed by:



KURIYAMA
OF AMERICA, INC.

HEADQUARTERS, SALES OFFICE AND WAREHOUSE

360 E. State Parkway, Schaumburg, IL 60173-5335
Phone: (847) 755-0360 • Toll-free Fax: (800) 800-0320
International Fax: (847) 885-0996



kuriyama.com



sales@kuriyama.com



The trademarks contained in this publication are trademarks of Kuriyama of America, Inc.

CONTACT OUR SALES/WAREHOUSE LOCATIONS BELOW WHICH SERVE YOUR AREA

SOUTHWEST WAREHOUSE

KURIYAMA OF AMERICA, INC.

– HOUSTON

200 Portwall Street, Suite 100
HOUSTON, TX 77029

Phone: (713) 674-8212

Toll Free Phone: (800) 501-6808

FAX: (713) 674-5214

Toll Free FAX: (800) 800-5214

E-Mail: sales@kuriyama.com

WESTERN WAREHOUSE

KURIYAMA OF AMERICA, INC.

– SANTA FE SPRINGS

10749 SHOEMAKER AVENUE

SANTA FE SPRINGS, CA 90670-4039

Phone: (562) 941-4507

FAX: (562) 941-8940

Toll-Free FAX: (800) 326-8940

E-Mail: sales@kuriyama.com

SOUTHEAST WAREHOUSE

FORTNEY SALES CO., INC.

4221 Cantrell Road NW

Acworth, GA 30101

Phone: (770) 427-6528

FAX: (770) 423-9249

Toll Free FAX: (800) 423-9249

Web Site: www.fortneysales.com

E-Mail: sales@fortneysales.com

EASTERN WAREHOUSE

EASTERN RUBBER & PLASTICS CO., INC.

100 GOLDMAN DR.

PLUMSTED INDUSTRIAL PARK

CREAM RIDGE, NJ 08514

Phone: (609) 758-0100

FAX: (609) 758-0102

Toll Free FAX: (800) 445-7138

Web Site: www.easternrubber.com

E-Mail: sales@easternrubber.com

IN MEXICO:

KURIYAMA DE MÉXICO S DE RL DE CV

AV JOSE PALOMO MARTINEZ NO 520-20 BODEGA 5

PARQUE INDUSTRIAL OMOLAP

APODACA, N.L. CP:66633, MÉXICO

Telefonos: (81) 1086-1870 0 71

Internet: www.kuriyama.com.mx

www.kuriyama.com

Correo Electronico: ventas@kuriyama.com



MADE IN NORTH AMERICA